SPECIFICATION



	LOA		16.22 m	53' 3"
цà	Hull length		15.75 m	51' 8"
A	LWL		14.90 m	48' 11"
	Beam		5.05 m	16' 7"
	Draft			
	shallow keel		2.20 m	7' 3"
	L-keel, medium		2.55 m	8' 4"
	T-keel, deep		2.80 m	9' 2"
	Displacement			
	shallow keel	approx.	19.80 t	43,652 lbs
548	L-keel, medium	approx.	19.60 t	43,211 lbs
	T-keel, deep	approx.	19.00 t	41,888 lbs
	Engine Diesel			
	standard	approx.	110 PS	110 hp
	Fuel tank	approx.	520 I	137 gal
	Fresh water	approx.	770	203 gal
	CE Certifcate	A - 12		
	Design	judel / vrolijk & co		
	Interior	HanseYachts Design		
	Mast length above WL	approx.	24.70 m	81' 0"
	Total sail area	approx.	138.00 m ²	1,485 sq ft
	Main sail			
	standard	approx.	80.50 m ²	866 sq ft

furling

Reacher

Gennaker

Self-tacking jib





Model year 2019. Valid from 2018.07.01. All measurements/figures are approximate. Errors and omissions excepted. Specification and material can be changed without notice.

approx.

approx.

approx.

approx.

71.00 m²

57.50 m²

100.00 m²

210.00 m²

764 sq ft

619 sq ft


1,076 sq ft

2,260 sq ft




CONCEP CABIN AYOUT& DECK L




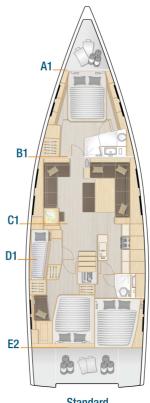


Standard

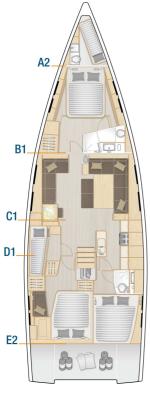

Option

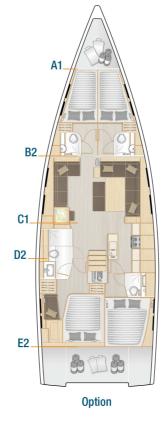

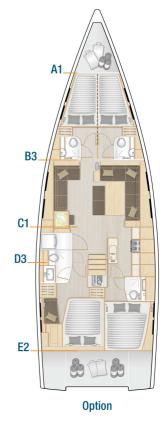

Hanse BREAKING RULES . SETTING TRENDS



STANDARD EQUIPMENT

HULL

- -12 hull windows (6 each side)
- GRP hull, isophthalic gelcoat, colour: Signal White (RAL 9003), 1st layer vinyl ester resin and balsa sandwich core.
- Waterline and cove line, isophthalic gelcoat, colour: Dark Grey (RAL 7043)

KEEL

- L-keel, cast iron, draft: 2.55m
- GRP rudder with seawater resistant aluminium shaft and self-aligning bearings

LAYOUT & INTERIOR

- A1: Sail locker with extensive storage space
- B1: Master cabin with island double berth, storage space and a head with separate shower stall
- C1: Saloon with full functional island galley and dining area on stb and lounge area with chart table on port
- D1: Cabin with double bunk bed on port with storage space
- E2: 2 aft cabins with VIP cabin on port incl. "Queen size" bed and guest cabin on stb with double berth, storage space and separate head
- 3-burner gas stove with oven, ventilation hood, waste bin, 12 V fridge approx. 140 I, double stainless steel sink with mixing tab
- Interior furniture in high quality marine plywood, Satin Varnish
- Hanse companionway closing system
- Saloon table, fixed
- 'Silent Master Cabin' cabin noise insulation (only with B1 Layout)
- Worktop in galley 'Corian' Anthracite

WOOD (FURNITURE, FLOORBOARD)

- Furniture Mahogany Style, Satin Varnish
- Cupboard fronts in wood colour
- Floorboard Acacia

UPHOLSTERY, CARPETS & CURTAINS

- Mattrasses for all berths
- Upholstery Monte Carlo, colour: Cream

DECK & OUTSIDE EQUIPMENT

- GRP deck with antislip surface, isophthalic gelcoat, colour: Signal White (RAL 9003), 1st layer vinyl ester resin with balsa sandwich core. Cockpit locker on stb, reduced dinghy garage, stowage for running rigging at helm position, anchor locker at bow.
- Teak on cockpit bottom
- Teak on cockpit benches
- Teak on bathing platform
- Twin wheel steering system with emergency tiller
- 2 stainless steel steering wheels with leather cover
- 2 cockpit tables, stainless steel with teak tops
- Pulpit and pushpit, stainless steel
- Railing, incl. stanchions and stainless steel wire with gateway stanchion
- Covered halyards and control lines lead to cockpit helm position, organizers and jammers, 6 retractable mooring cleats, handrail on coach roof, bow anchor fitting with step
- 2 LEWMAR 65 ST EVO manual halyard winches
- Bathing platform, hydraulic fold-out, remote control and swimming ladder
- Anchor windlass, electrical, 1500 W remote control with chain counter (only with XH1001)
- Anchor and forestay fitting
- Self tacking jib system
- Mainsheet system
- 7 large and 6 small deck hatches openable, anchor locker hatch
- 6 deck coach roof windows with portlight for aft bathroom

RIG & SAILS

- Rig, anodized aluminium, keel stepped, with kicker, standing and running rigging and 2 reefs
- Manual jib furler
- ELVSTRÖM Dacron sails full battened, main and jib

NAVIGATION & INSTRUMENTS

- Illuminated compass at each helm
- Navigation lights LED





STANDARD EQUIPMENT

PROPULSION

- Fuel tank, approx. 520 I
- Engine (Diesel, approx. 107 hp) shaft drive, 3-blade folding propeller

EQUIPMENT

- 12 V and 230 V electric system with digitial switchboard, 230 V shore power and sockets in cabins and heads
- AGM battery set, capacity: 1x 90 Ah + 2x 160 Ah AGM
- Country Version: EU / AUS
- Battery charger 70 A
- Manual toilet with sea water flush cabin layout B1 (only with XL2001)
- Shower unit in cockpit, warm-/coldwater
- LPG gas system, stowage for 2 gas bottles
- Blackwater system (appr. 85 I per head / appr. 35 I head stb aft) with deck extraction and seacock for head, electric and manual bilge pump
- Freshwater system with electric pump and 40 I hot water, heated by main engine
- Fresh water tank, appr. 770 I

ACCESSORIES

- Mast steps

SHIPPING & TRANSPORT

- CE Certificate cat. A 12
- Owners manual
- EC Type Examination Certificate

